


ASRock® Jumpers and Headers Setting Guide

SBC-230-WT

The terms HDMI™ and HDMI High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

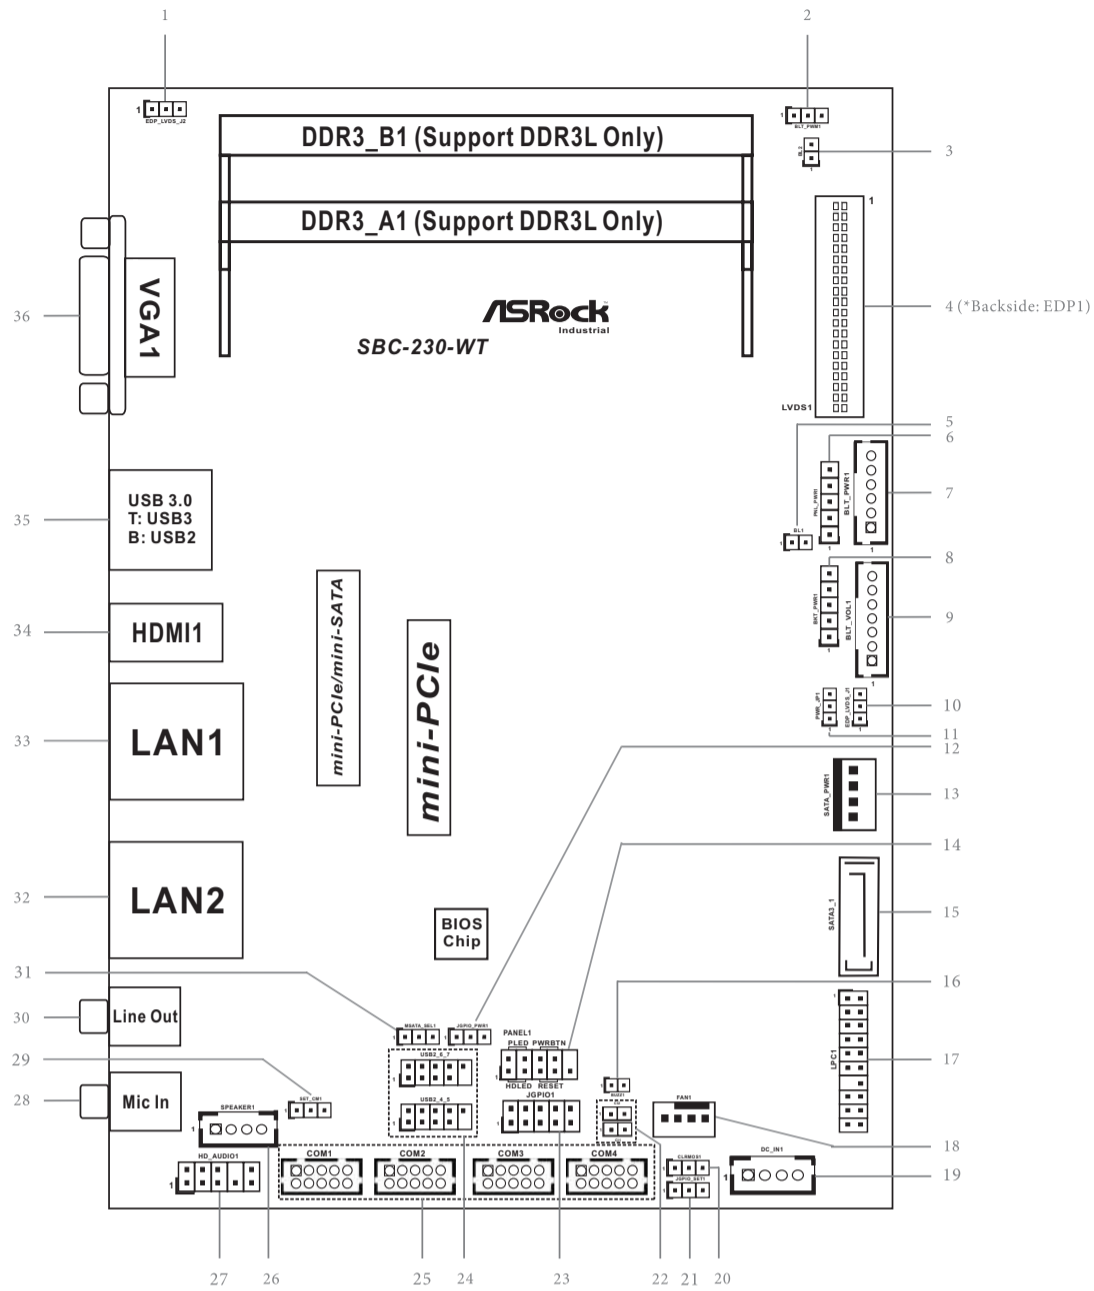

1 : EDP_LVDS_J2
1-2 : eDP
2-3 : LVDS

2 : Backlight Control Level (BLT_PWM1) (Optional)
1-2 : +3V
2-3 : +5V

3 : BL2

4 : LVDS Panel Connector

PIN	Signal Name	PIN	Signal Name
2	LCD_VCC	1	LCD_VCC
4	LDCC_CLK	3	+3.3V
6	LVDS_A_DATA0#	5	LDCC_DATA
8	GND	7	LVDS_A_DATA0
10	LVDS_A_DATA1	9	LVDS_A_DATA1#
12	LVDS_A_DATA2#	11	GND
14	GND	13	LVDS_A_DATA2
16	LVDS_A_DATA3	15	LVDS_A_DATA3#
18	LVDS_A_CLK#	17	GND
20	GND	19	LVDS_A_CLK
22	LVDS_B_DATA0	21	LVDS_B_DATA0#
24	LVDS_B_DATA1#	23	GND
26	GND	25	LVDS_B_DATA1
28	LVDS_B_DATA2	27	LVDS_B_DATA2#
30	LVDS_B_DATA3#	29	DPLVDD_EN
32	GND	31	LVDS_B_DATA3
34	LVDS_B_CLK	33	LVDS_B_CLK#
36	CON_LBKLKT_EN	35	GND
38	LCD_BLT_VCC	37	CON_LBKLKT_CTL
40	LCD_BLT_VCC	39	LCD_BLT_VCC

* eDP Connector (on the Backside of PCB)

5 : BL1

6 : Panel Power Selection (LCD_VCC) (PNL_PWR1)
1-2 : +3V
2-3 : +5V
3-4 : +5V
4-5 : +12V

7 : Inverter Power Control Wafer (BLT_PWR1)

PIN	Signal Name
6	LCD_BLT_VCC
5	LCD_BLT_VCC
4	CON_LBKLKT_EN
3	CON_LBKLKT_CTL
2	GND
1	GND

8 : Backlight Power Select (LCD_BLT_VCC) (BKT_PWR1)
1-2 : +5V
2-3 : +12V
3-4 : +12V
4-5 : DC_IN Power

9 : Backlight & Amp Volume Control (BLT_VOL1)

PIN	Signal Name
7	GND
6	GND
5	GPIO_BLT_DW
4	GPIO_BLT_UP
3	PWRDN
2	GPIO_VOL_DW
1	GPIO_VOL_UP

10 : EDP_LVDS_J1
1-2 : eDP
2-3 : LVDS

11 : ATX/AT Mode Select (PWR_JP1)
1-2 : AT Mode
2-3 : ATX Mode

12 : Digital Input / Output Power Select (JGPIO_PWR1)
1-2 : +12V
2-3 : +5V

13 : SATA Power Output Connector

14 : System Panel Header

15 : SATA3 Connector (SATA3_1)

16 : 2-Pin Buzzer Header

17 : LPC Header

18 : 4-Pin FAN Connector (+12V)

19 : ATX Power Connector (Input 12V)

20 : Clear CMOS Header


21 : GPIO Default Setting (JGPIO_SET1)

1-4 : GND
2-3 : DC Input

1-2 : Normal
2-3 : Clear CMOS

1-2 : Pull-High
2-3 : Pull-Low

PIN	Signal Name
40	NA
39	LCD_BLT_VCC
38	LCD_BLT_VCC
37	LCD_BLT_VCC
36	LCD_BLT_VCC
35	NA
34	NA
33	CON_LBKLKT_CTL
32	CON_LBKLKT_EN
31	GND
30	GND
29	GND
28	GND
27	eDP_HPDC_CON
26	GND
25	GND
24	GND
23	GND
22	NA
21	LCD_VCC
20	LCD_VCC
19	LCD_VCC
18	LCD_VCC
17	GND
16	eDP_AUX#_CON
15	eDP_AUX_CON
14	GND
13	eDP_TX0_CON
12	eDP_TX#0_CON
11	GND
10	eDP_TX1_CON
9	eDP_TX#1_CON
8	GND
7	eDP_TX2_CON
6	eDP_TX#2_CON
5	GND
4	eDP_TX3_CON
3	eDP_TX#3_CON
2	GND
1	NA

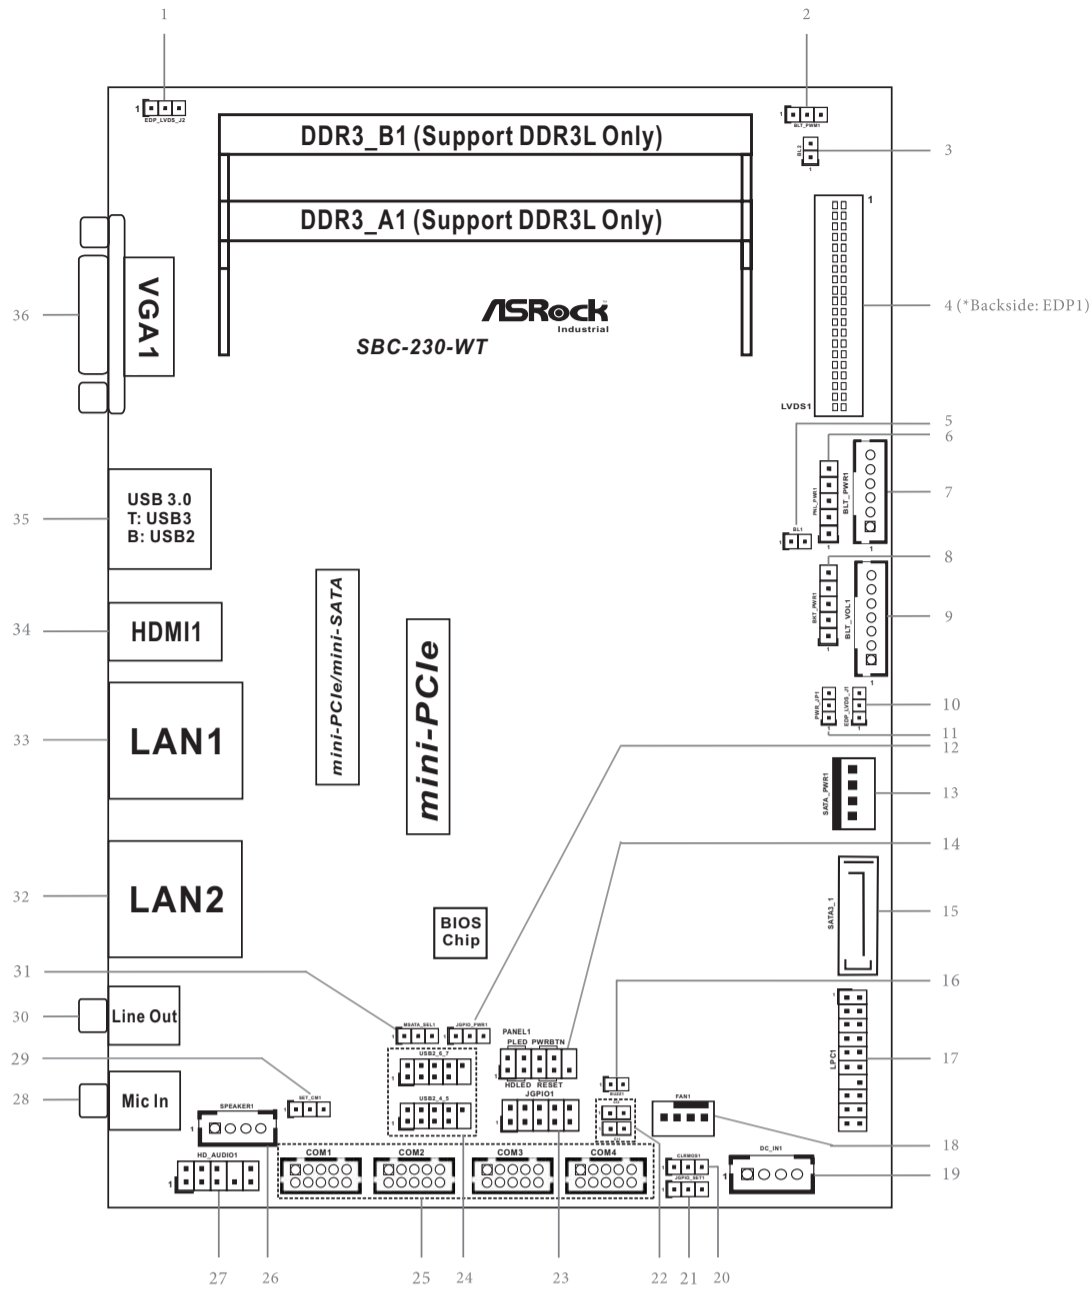


22 : Chassis Intrusion Headers
 C11 :
 Close : Active Case Open
 Open : Normal
 C12 :
 Close : Normal
 Open : Active Case Open



26 : 3W Audio AMP Output Wafer


PIN	Signal Name	PIN	Signal Name	PIN	Signal Name	PIN	Signal Name
1	SPK L-	2	SPK L+	3	SPK R+	4	SPK R-

23 : Digital Input / Output Pin Header (JGPIO1)




PIN	Signal Name	PIN	Signal Name	PIN	Signal Name	PIN	Signal Name	PIN	Signal Name
2	SIO_GP30	4	SIO_GP31	6	SIO_GP32	8	SIO_GP33	10	GND
1	SIO_GP34	3	SIO_GP35	5	SIO_GP36	7	SIO_GP37	9	JGPIO_PWR


27 : Front Panel Audio Header



24 : USB2.0 Connectors (USB2_4_5, USB2_6_7)



25 : COM1, 2, 3, 4 Headers



PIN	Signal Name	PIN	Signal Name	PIN	Signal Name	PIN	Signal Name	PIN	Signal Name
1	DDCD#	3	TTXD	5	GND	7	RRTS#	9	COM_PWR
2	RRXD	4	DDTR#	6	DDSR#	8	CCTS#	10	DUMMY

* This motherboard supports RS232/422/485 on COM1 port. Please refer to below table for the pin definition. In addition, COM1 port (RS232/422/485) can be adjusted in BIOS setup utility > Advanced Screen > Super IO Configuration. You may refer to our user manual for details.

COM1 Port Pin Definition

PIN	RS232	RS422	RS485
1	DCD	TX-	RTX-
2	RXD	RX+	N/A
3	TXD	TX+	RTX+
4	DTR	RX-	N/A
5	GND	GND	GND
6	DSR	N/A	N/A
7	RTS	N/A	N/A
8	CTS	N/A	N/A
9	NA/+5V/+12V	N/A	N/A

28 : Audio Output: Pink – Mic In

29 : COM1 Pin9 PWR Setting Jumper (SET_CM1)



30 : Audio Output: Green – Line Out

31 : mSATA Select (MSATA_SEL1)



32 : LAN Port (LAN2)

33 : LAN Port (LAN1)

34 : HDMI Port (HDMI1)

35 : USB3.0 Ports (USB3_2_3)

36 : VGA Port (VGA1)