



IMB-148

User Manual

Version 1.0

Published January 2014

Copyright©2014 ASRock INC. All rights reserved.

Copyright Notice:

No part of this manual may be reproduced, transcribed, transmitted, or translated in any language, in any form or by any means, except duplication of documentation by the purchaser for backup purpose, without written consent of ASRock Inc.

Products and corporate names appearing in this manual may or may not be registered trademarks or copyrights of their respective companies, and are used only for identification or explanation and to the owners' benefit, without intent to infringe.

Disclaimer:

Specifications and information contained in this manual are furnished for informational use only and subject to change without notice, and should not be constructed as a commitment by ASRock. ASRock assumes no responsibility for any errors or omissions that may appear in this manual.

With respect to the contents of this manual, ASRock does not provide warranty of any kind, either expressed or implied, including but not limited to the implied warranties or conditions of merchantability or fitness for a particular purpose.

In no event shall ASRock, its directors, officers, employees, or agents be liable for any indirect, special, incidental, or consequential damages (including damages for loss of profits, loss of business, loss of data, interruption of business and the like), even if ASRock has been advised of the possibility of such damages arising from any defect or error in the manual or product.



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

CALIFORNIA, USA ONLY

The Lithium battery adopted on this motherboard contains Perchlorate, a toxic substance controlled in Perchlorate Best Management Practices (BMP) regulations passed by the California Legislature. When you discard the Lithium battery in California, USA, please follow the related regulations in advance.

“Perchlorate Material-special handling may apply, see www.dtsc.ca.gov/hazardouswaste/perchlorate”

The terms HDMI™ and HDMI High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.



Contents

1 Introduction	5
1.1 Package Contents	5
1.2 Specifications.....	6
1.3 Motherboard Layout.....	8
1.4 I/O Panel.....	10
2 Installation	11
2.1 Screw Holes.....	11
2.2 Pre-installation Precautions.....	11
2.3 Installation of Memory Modules (DIMM).....	12
2.4 Expansion Slots	13
2.5 Jumpers Setup.....	14
2.6 Onboard Headers and Connectors.....	16
2.7 Driver Installation Guide	21
3 UEFI SETUP UTILITY.....	22
3.1 Introduction.....	22
3.1.1 UEFI Menu Bar	22
3.1.2 Navigation Keys	23
3.2 Main Screen.....	23
3.3 Advanced Screen.....	24
3.3.1 CPU Configuration	25
3.3.2 Chipset Configuration.....	26
3.3.3 Storage Configuration	27
3.3.4 Super IO Configuration	28
3.3.5 ACPI Configuration.....	29
3.3.6 USB Configuration	30
3.3.7 Voltage Configuration.....	31
3.4 Hardware Health Event Monitoring Screen	32
3.5 Boot Screen.....	33
3.6 Security Screen	34
3.7 Exit Screen	35

4 Software Support	36
4.1 Install Operating System.....	36
4.2 Support CD Information	36
4.2.1 Running Support CD.....	36
4.2.2 Drivers Menu.....	36
4.2.3 Utilities Menu.....	36
4.2.4 Contact Information.....	36

Chapter 1: Introduction

Thank you for purchasing ASRock **IMB-148** motherboard, a reliable motherboard produced under ASRock's consistently stringent quality control. It delivers excellent performance with robust design conforming to ASRock's commitment to quality and endurance.

In this manual, chapter 1 and 2 contain introduction of the motherboard and step-by-step guide to the hardware installation. Chapter 3 and 4 contain the configuration guide to BIOS setup and information of the Support CD.



Because the motherboard specifications and the BIOS software might be updated, the content of this manual will be subject to change without notice. In case any modifications of this manual occur, the updated version will be available on ASRock website without further notice. You may find the latest VGA cards and CPU support lists on ASRock website as well. ASRock website <http://www.asrock.com>

If you require technical support related to this motherboard, please visit our website for specific information about the model you are using.

www.asrock.com/support/index.asp

1.1 Package Contents

ASRock **IMB-148** Motherboard

(Mini-ITX Form Factor: 6.7-in x 6.7-in, 17.0 cm x 17.0 cm)

ASRock **IMB-148** Driver CD

ASRock **IMB-148** Jumper Setting Instruction


1 x I/O Panel Shield

1.2 Specifications

Form Factor	Dimensions	Mini-ITX (6.7-in x 6.7-in)
Processor System	CPU	Intel® Atom™ CedarView Processor D2550 Supports Hyper-Threading Technology
	Core Number	2
	Max Speed	D2550: 1.86 GHz
	Cache	1MB
	Chipset	NM10
	BIOS	UEFI
Expansion Slot	PCI	0
	Mini-PCIe	1 (half size) PCIe only
	mSATA	0
	PCIe	1 (x1)
	CFast Card Socket	0
Memory	Technology	Single Channel DDR3 800/1066 MHz SDRAM
	Max.	4GB
	Socket	2 x SODIMM
Graphics	Controller	Intel® PowerVR SGX545, Support DirectX9 compliant Pixel Shader v3.0 and OGL 3.0
	VRAM	Shared Memory
	VGA	Supports max. resolution 1920 x 1200
	LVDS	Single channel 24-bit, max resolution 1440x900 @ 60Hz
	HDMI	1
	DVI	No
	DisplayPort	No
	MultiDisplay	Yes (Dual Display)
Ethernet	Ethernet	10/100/1000 Mbps
	Controller	GbE LAN Realtek
	Connector	1 x RJ-45
SATA	Max Data Transfer Rate	SATA2 (3.0Gb/s)
Rear I/O	VGA	1
	DVI	0
	HDMI	1


	DisplayPort	0
	Ethernet	1
	USB	4 x USB 2.0
	Audio	2 (Mic-In, Line-Out)
	Serial	0
	PS/2	0
Internal Connector	USB	4 x USB 2.0
	LVDS/ Inverter	1/1
	VGA	1 (shared with rear I/O VGA)
	Serial	4 (RS-232)
	SATA	2 x SATA2 (3.0Gb/s)
	mPCIe	1
	Parallel	1
	mSATA	0
	IrDA	0
	GPIO 8-bit	4 in / 4 out
	SATA PWR Output Con	1
	Speaker Header	1
Watchdog Timer	Output	From Super I/O to drag RESETCON#
	Interval	256 Segments, 0,1,2...255 Sec/Min
Power Requirements	Input PWR	9~19V DC-In (DC-Jack or 2-pin PWR Con)
	Power On	AT/ATX Supported -AT : Directly PWR on as power input ready -ATX : Press button to PWR on after power input ready
Environment	Temperature	0°C – 60°C

1.3 Motherboard Layout

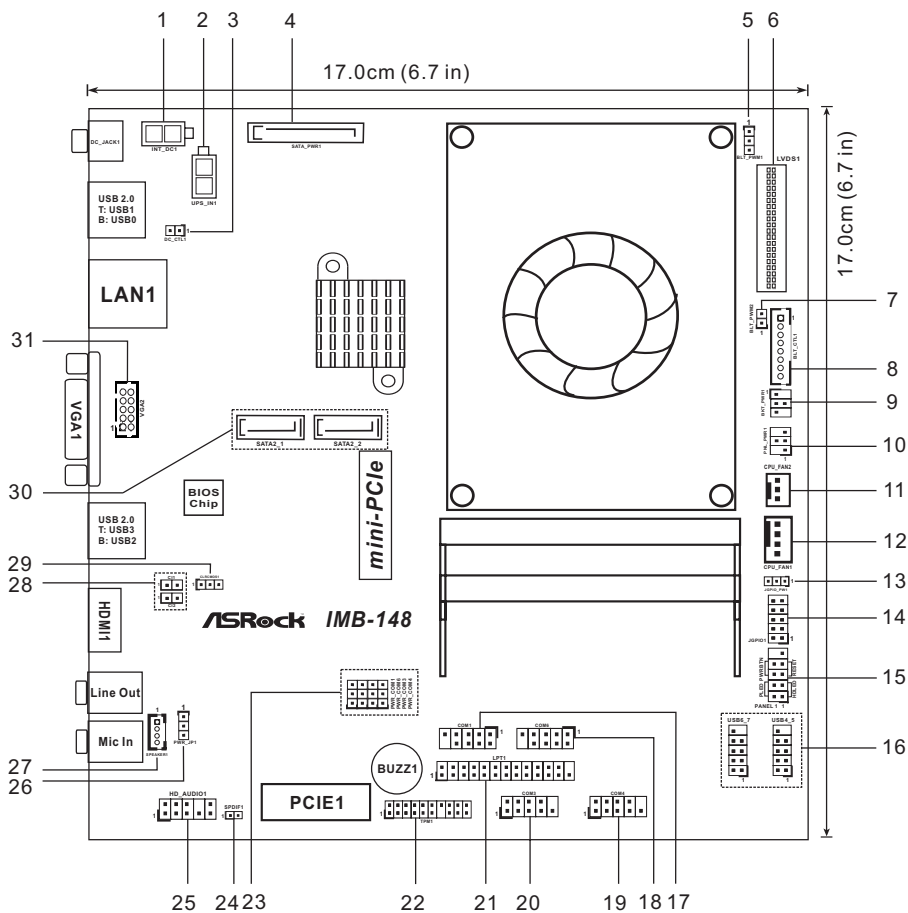

-
- 1 : 2-pin ATX Power Input/Output Connector
 - 2 : 2-pin UPS Module Power Input Connector
 - 3 : Input Power Setting (DC_CTL1)
 - 4 : SATA Power Output Connector
 - 5 : Backlight Control Level (VBIOS) (BLT_PWM1)
 - 6 : LVDS Panel Connector
 - 7 : Backlight Control (PWM) (BLT_PWM2)
 - 8 : Panel Brightness Control (BLT_CTL1)
 - 9 : Backlight Power Selection (BKT_PWR1)
 - 10 : Panel Power Selection (PNL_PWR1)
 - 11 : 3-Pin CPU FAN Connector (+12V)
 - 12 : 4-Pin CPU FAN Connector (+12V)
 - 13 : Digital Input / Output Power Selection
 - 14 : Digital Input / Output Pin Header
 - 15 : System Panel Header
 - 16 : USB2.0 Headers (USB4_5, USB6_7)
 - 17 : RS-232 Port 4 Pin Header (COM1)
 - 18 : RS-232 Port 4 Pin Header (COM6)
 - 19 : RS-232 Port 4 Pin Header (COM4)
 - 20 : RS-232 Port 4 Pin Header (COM3)
 - 21 : Printer Port Header
 - 22 : TPM Header
 - 23 : COM Port Power Control (PWR_COM1, PWR_COM6, PWR_COM3,
PWR_COM4)
 - 24 : SPDIF Header
 - 25 : Front Panel Audio Header
 - 26 : ATX/AT Mode Selection
 - 27 : 3W Audio AMP Output Wafer
 - 28 : Chassis Intrusion Headers (CI1, CI2)
 - 29 : Clear CMOS Header
 - 30 : SATA2 Connectors (SATA2_1, SATA2_2)
 - 31 : VGA Connector

1.4 I/O Panel

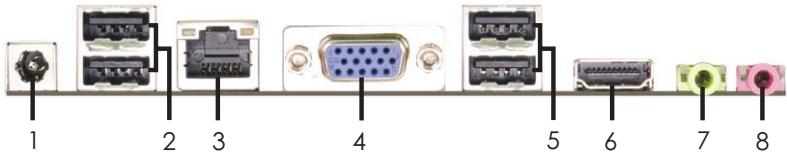


- | | | | |
|-----|------------------------|---|------------------------|
| 1 | DC Jack (DC_JACK1) | 5 | USB 2.0 Ports (USB2_3) |
| 2 | USB 2.0 Ports (USB0_1) | 6 | HDMI Port (HDMI1) |
| * 3 | LAN RJ-45 Port (LAN1) | 7 | Line out (Lime) |
| 4 | VGA Port (VGA1) | 8 | Microphone (Pink) |

* There are two LED next to the LAN port. Please refer to the table below for the LAN port LED indications.

LAN Port LED Indications

Activity/Link LED	
Status	Description
Off	No Link
Blinking	Data Activity
On	Link

SPEED LED	
Status	Description
Off	10Mbps connection
Off	100Mbps connection
Orange	1Gbps connection



Chapter 2: Installation

This is a Mini-ITX form factor (6.7" x 6.7", 17.0 x 17.0 cm) motherboard. Before you install the motherboard, study the configuration of your chassis to ensure that the motherboard fits into it.



Make sure to unplug the power cord before installing or removing the motherboard. Failure to do so may cause physical injuries to you and damages to motherboard components.

2.1 Screw Holes

Place screws into the holes to secure the motherboard to the chassis.



Do not over-tighten the screws! Doing so may damage the motherboard.

2.2 Pre-installation Precautions

Take note of the following precautions before you install motherboard components or change any motherboard settings.

1. Unplug the power cord from the wall socket before touching any component.
2. To avoid damaging the motherboard components due to static electricity, NEVER place your motherboard directly on the carpet or the like. Also remember to use a grounded wrist strap or touch a safety grounded object before you handle components.
3. Hold components by the edges and do not touch the ICs.
4. Whenever you uninstall any component, place it on a grounded antistatic pad or in the bag that comes with the component.




Before you install or remove any component, ensure that the power is switched off or the power cord is detached from the power supply. Failure to do so may cause severe damage to the motherboard, peripherals, and/or components.

2.3 Installation of Memory Modules (SO-DIMM)

This motherboard provides two 204-pin DDR3 (Double Data Rate 3) SO-DIMM slots.

- Step 1. Align a DIMM on the slot such that the notch on the DIMM matches the break on the slot.

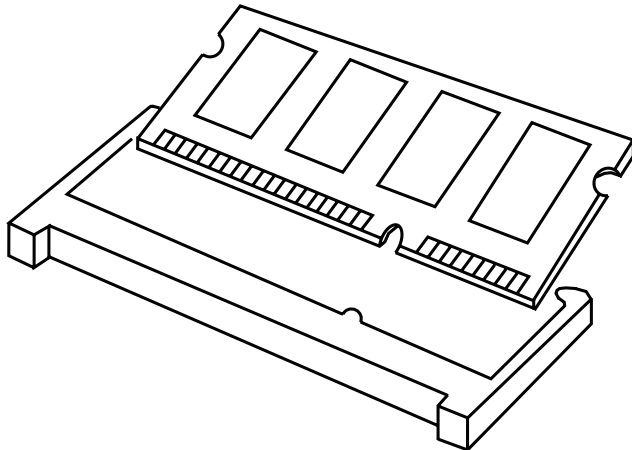

The DIMM only fits in one correct orientation. It will cause permanent damage to the motherboard and the DIMM if you force the DIMM into the slot at incorrect orientation.

- Step 2. Firmly insert the DIMM into the slot until the retaining clips at both ends fully snap back in place and the DIMM is properly seated.

2.4 Expansion Slots (PCI Express and mini-PCIe Slots)

There is 1 PCI Express slot and 1 mini-PCIe slot on this motherboard.

PCIe slot: PCIe1 (PCIe x1 slot) is used for PCI Express x1 lane width cards.

mini-PCIe slot:


MINI_PCIE2 (mini-PCIe slot; half size) is used for PCI Express mini cards.

Installing an expansion card

- Step 1. Before installing the expansion card, please make sure that the power supply is switched off or the power cord is unplugged. Please read the documentation of the expansion card and make necessary hardware settings for the card before you start the installation.
- Step 2. Remove the system unit cover (if your motherboard is already installed in a chassis).
- Step 3. Remove the bracket facing the slot that you intend to use. Keep the screws for later use.
- Step 4. Align the card connector with the slot and press firmly until the card is completely seated on the slot.
- Step 5. Fasten the card to the chassis with screws.
- Step 6. Replace the system cover.

2.5 Jumpers Setup

The illustration shows how jumpers are setup. When the jumper cap is placed on pins, the jumper is “Short”. If no jumper cap is placed on pins, the jumper is “Open”. The illustration shows a 3-pin jumper whose pin1 and pin2 are “Short” when jumper cap is placed on these 2 pins.

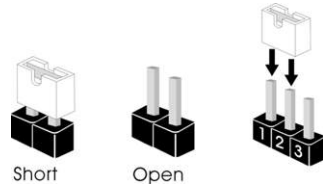

Jumper	Setting	Description
Clear CMOS Jumper (3-pin CLRCMOS1) (see p.8, No. 29)	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>1_2</p> <p>Default</p> </div> <div style="text-align: center;"> <p>2_3</p> <p>Clear CMOS</p> </div> </div>	

Note: CLRCMOS1 allows you to clear the data in CMOS. To clear and reset the system parameters to default setup, please turn off the computer and unplug the power cord from the power supply. After waiting for 15 seconds, use a jumper cap to short pin2 and pin3 on CLRCMOS1 for 5 seconds. However, please do not clear the CMOS right after you update the BIOS. If you need to clear the CMOS when you just finish updating the BIOS, you must boot up the system first, and then shut it down before you do the clear-CMOS action. Please be noted that the password, date, time, user default profile and MAC address will be cleared only if the CMOS battery is removed.

Backlight Control Level (VBIOS) (CON_LBKLT_CTL) (3-pin BLT_PWM1) (see p.8, No. 5)		<p>1-2 : +3V</p> <p>2-3 : +5V</p>
--	--	-----------------------------------

Backlight Control (PWM) (2-pin BLT_PWM2) (see p.8, No. 7)		1-2 : PWM Control (in BIOS)
---	--	-----------------------------

Panel Brightness Control (8-pin BLT_CLT1) (see p.8, No. 8)		<table border="1"> <thead> <tr> <th>PIN</th> <th>Signal Name</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>CON_LBKLT_EN</td> </tr> <tr> <td>2</td> <td>CON_LBKLT_CTL</td> </tr> <tr> <td>3</td> <td>LCD_BLT_VCC</td> </tr> <tr> <td>4</td> <td>LCD_BLT_VCC</td> </tr> <tr> <td>5</td> <td>GND</td> </tr> <tr> <td>6</td> <td>GND</td> </tr> <tr> <td>7</td> <td>GPIO_BLT_UP</td> </tr> <tr> <td>8</td> <td>GPIO_BLT_DW</td> </tr> </tbody> </table>	PIN	Signal Name	1	CON_LBKLT_EN	2	CON_LBKLT_CTL	3	LCD_BLT_VCC	4	LCD_BLT_VCC	5	GND	6	GND	7	GPIO_BLT_UP	8	GPIO_BLT_DW
PIN	Signal Name																			
1	CON_LBKLT_EN																			
2	CON_LBKLT_CTL																			
3	LCD_BLT_VCC																			
4	LCD_BLT_VCC																			
5	GND																			
6	GND																			
7	GPIO_BLT_UP																			
8	GPIO_BLT_DW																			

Input Power Setting

(2-pin DC_CTL1)

(see p.8, No. 3)



Power Input Voltage > +12V: Short
Power Input Voltage ≤ +12V: Open

Panel Power Selection

(4-pin PNL_PWR1)

(see p.8, No. 10)



PIN	Signal Name
1	+3.3V
2	NC
3	LCD_VCC
4	+12V
5	+5V
6	NC

Backlight Power Selection

(4-pin BKT_PWR1)

(see p.8, No. 9)




PIN	Signal Name
1	+5V
2	NC
3	LCD_BLT_VCC
4	+Vin
5	+12V
6	NC

Digital Input / Output Power Select

(3-pin JGPIO_PWR1)

(see p.8, No. 13)



1-2 : +12V

2-3 : +5V

ATX/AT Mode Selection

(3-pin PWR_JP1)

(see p.8, No. 26)



1-2 : AT Mode

2-3 : ATX Mode

COM Port Power Control


(3-pin PWR_COM1, for COM1)

(3-pin PWR_COM6, for COM6)

(3-pin PWR_COM3, for COM3)

(3-pin PWR_COM4, for COM4)

(see p.8, No. 23)



1-2 : +5V

2-3 : +12V


2.6 Onboard Headers and Connectors



Onboard headers and connectors are NOT jumpers. Do NOT place jumper caps over these headers and connectors. Placing jumper caps over the headers and connectors will cause permanent damage of the motherboard!

LVDS Panel Connector


(40-pin LVDS1)
(see p.8, No. 6)



PIN	Signal Name	PIN	Signal Name
2	LCD_VCC	1	LCD_VCC
4	LDDC_CLK	3	+3V
6	LVDS_A_DATA0#	5	LDDC_DATA
8	GND	7	LVDS_A_DATA0
10	LVDS_A_DATA1	9	LVDS_A_DATA1#
12	LVDS_A_DATA2#	11	GND
14	GND	13	LVDS_A_DATA2
16	LVDS_A_DATA3	15	LVDS_A_DATA3#
18	LVDS_A_CLK#	17	GND
20	GND	19	LVDS_A_CLK
22	LVDS_B_DATA0	21	LVDS_B_DATA0#
24	LVDS_B_DATA1#	23	GND
26	GND	25	LVDS_B_DATA1
28	LVDS_B_DATA2	27	LVDS_B_DATA2#
30	LVDS_B_DATA3#	29	DPLVDD_EN
32	GND	31	LVDS_B_DATA3
34	LVDS_B_CLK	33	LVDS_B_CLK#
36	CON_LBKLT_EN	35	GND
38	LCD_BLT_VCC	37	CON_LBKLT_CTL
40	LCD_BLT_VCC	39	LCD_BLT_VCC

Digital Input / Output Pin Header

(10-pin JGPIO1)
(see p.8, No. 14)



PIN	Signal Name	PIN	Signal Name
10	GND	9	JGPIO_PWR
8	SIO_GP23	7	SIO_GP27
6	SIO_GP22	5	SIO_GP26
4	SIO_GP21	3	SIO_GP25
2	SIO_GP20	1	SIO_GP24

UPS Module Power Input Connector

(2-pin UPS_IN1)
(see p.8, No. 2)



ATX Power Input/Output Connector

(2-pin INT_DC1)
(see p.8, No. 1)



SATA Power Output Connector

(SATA_PWR1)


(see p.8, No. 4)



RS-232 Port 4 Pin Headers


(9-pin COM1: see p.8, No. 17)

(9-pin COM6: see p.8, No. 18)



(9-pin COM3: see p.8, No. 20)


(9-pin COM4: see p.8, No. 19)



CPU Fan Connectors

(4-pin CPU_FAN1)

(see p.8 No. 12)




Please connect the CPU fan cable to the connector and match the black wire to the ground pin.



Though this motherboard provides 4-Pin CPU fan (Quiet Fan) support, the 3-Pin CPU fan still can work successfully even without the fan speed control function. If you plan to connect the 3-Pin CPU fan to the CPU fan connector on this motherboard, please connect it to Pin 1-3.


Pin 1-3 Connected ←

3-Pin Fan Installation



(3-pin CPU_FAN2)

(see p.8 No. 11)




SPDIF Header

(2-pin SPDIF1: see p.8, No. 24)



VGA Connector

(10-pin VGA2: see p.8, No. 31)




PIN	Signal Name	PIN	Signal Name
1	RED	2	GND
3	GRN	4	GND
5	BLUE	6	GND
7	HSYNC	8	VSYNC
9	DDC_CLK	10	DDC_DATA

System Panel Header

(9-pin PANEL1)

(see p.8, No. 15)



This header accommodates several system front panel functions.



Connect the power switch, reset switch and system status indicator on the chassis to this header according to the pin assignments below. Note the positive and negative pins before connecting the cables.

PWRBTN (Power Switch):

Connect to the power switch on the chassis front panel. You may configure the way to turn off your system using the power switch.

RESET (Reset Switch):

Connect to the reset switch on the chassis front panel. Press the reset switch to restart the computer if the computer freezes and fails to perform a normal restart.

PLED (System Power LED):

Connect to the power status indicator on the chassis front panel. The LED is on when the system is operating. The LED keeps blinking when the system is in S1/S3 sleep state. The LED is off when the system is in S4 sleep state or powered off (S5).

HDLED (Hard Drive Activity LED):


Connect to the hard drive activity LED on the chassis front panel. The LED is on when the hard drive is reading or writing data.

The front panel design may differ by chassis. A front panel module mainly consists of power switch, reset switch, power LED, hard drive activity LED, speaker and etc. When connecting your chassis front panel module to this header, make sure the wire assignments and the pin assignments are matched correctly.

SATA2 Connectors

(SATA2_1/SATA2_2:

see p.8, No. 30)



These two Serial ATA2 (SATA2) connectors support SATA data cables for internal storage devices. The current SATA2 interface allows up to 3.0 Gb/s data transfer rate.

3W Audio Amp Output Wafer


(4-pin SPEAKER1)
(see p.8, No. 27)



PIN	Signal Name
1	SPK L-
2	SPK L+
3	SPK R+
4	SPK R-

USB 2.0 Headers

(9-pin USB4_5/USB6_7:
see p.8, No. 16)



Besides four default USB 2.0 ports on the I/O panel, there are two USB 2.0 headers on this motherboard. Each USB 2.0 header can support two USB 2.0 ports.

Chassis Intrusion Headers


(2-pin C11/C12: see p.8, No. 28)



This motherboard supports CASE OPEN detection feature that detects if the chassis cover has been removed. This feature requires a chassis with chassis intrusion detection design.

Front Panel Audio Header


(9-pin HD_AUDIO1)
(see p.8 No. 25)



This is an interface for front panel audio cable that allows convenient connection and control of audio devices.

TPM Header

(17-pin TPM1)
(see p.8, No. 22)




This connector supports a Trusted Platform Module (TPM) system, which can securely store keys, digital certificates, passwords, and data. A TPM system also helps enhance network security, protects digital identities, and ensures platform integrity.

Print Port Header

(25-pin LPT1)

(see p.8, No. 21)

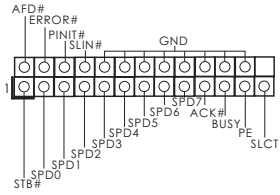

This is an interface for print port cable that allows convenient connection of printer devices.

2.7 Driver Installation Guide

To install the drivers to your system, please insert the support CD to your optical drive first. Then, the drivers compatible to your system can be auto-detected and listed on the support CD driver page. Please follow the order from top to bottom to install those required drivers. Therefore, the drivers you install can work properly.

Chapter 3: UEFI SETUP UTILITY

3.1 Introduction

This section explains how to use the UEFI SETUP UTILITY to configure your system. The UEFI chip on the motherboard stores the UEFI SETUP UTILITY. You may run the UEFI SETUP UTILITY when you start up the computer. Please press <F2> or during the Power-On-Self-Test (POST) to enter the UEFI SETUP UTILITY, otherwise, POST will continue with its test routines.

If you wish to enter the UEFI SETUP UTILITY after POST, restart the system by pressing <Ctl> + <Alt> + <Delete>, or by pressing the reset button on the system chassis. You may also restart by turning the system off and then back on.



Because the UEFI software is constantly being updated, the following UEFI setup screens and descriptions are for reference purpose only, and they may not exactly match what you see on your screen.

3.1.1 UEFI Menu Bar

The top of the screen has a menu bar with the following selections:

Main	To set up the system time/date information
Advanced	To set up the advanced UEFI features
H/W Monitor	To display current hardware status
Boot	To set up the default system device to locate and load the Operating System
Security	To set up the security features
Exit	To exit the current screen or the UEFI SETUP UTILITY

Use <←> key or <→> key to choose among the selections on the menu bar, and then press <Enter> to get into the sub screen. You can also use the mouse to click your required item.


3.1.2 Navigation Keys

Please check the following table for the function description of each navigation key.

Navigation Key(s)	Function Description
← / →	Moves cursor left or right to select Screens
↑ / ↓	Moves cursor up or down to select items
+ / -	To change option for the selected items
<Enter>	To bring up the selected screen
<F1>	To display the General Help Screen
<F7>	Discard changes
<F9>	To load optimal default values for all the settings
<F10>	To save changes and exit the UEFI SETUP UTILITY
<F12>	Print screen
<ESC>	To jump to the Exit Screen or exit the current screen


3.2 Main Screen

When you enter the UEFI SETUP UTILITY, the Main screen will appear and display the system overview.

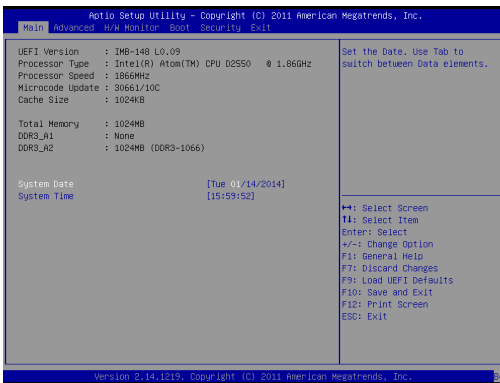

3.3 Advanced Screen

In this section, you may set the configurations for the following items: CPU Configuration, Chipset Configuration, Storage Configuration, Super IO Configuration, ACPI Configuration, USB Configuration and Voltage Configuration.

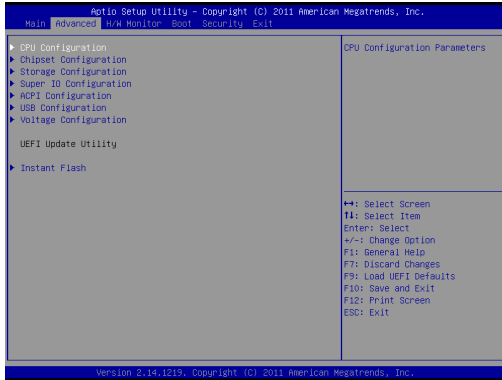


Setting wrong values in this section may cause the system to malfunction.

Instant Flash

Instant Flash is a UEFI flash utility embedded in Flash ROM. This convenient UEFI update tool allows you to update system UEFI without entering operating systems first like MS-DOS or Windows®. Just launch this tool and save the new UEFI file to your USB flash drive, floppy disk or hard drive, then you can update your UEFI only in a few clicks without preparing an additional floppy diskette or other complicated flash utility. Please be noted that the USB flash drive or hard drive must use FAT32/16/12 file system. If you execute Instant Flash utility, the utility will show the UEFI files and their respective information. Select the proper UEFI file to update your UEFI, and reboot your system after UEFI update process completes.

3.3.1 CPU Configuration

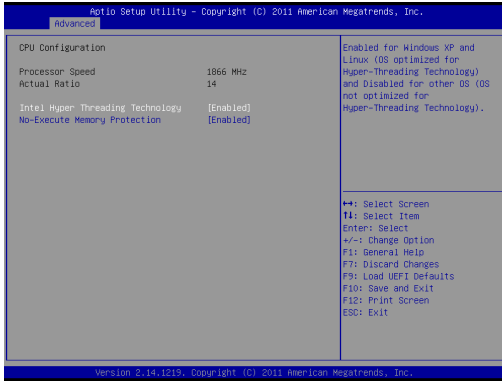


Intel Hyper Threading Technology

To enable this feature, it requires a computer system with an Intel processor that supports Hyper-Threading technology and an operating system that includes optimization for this technology, such as Microsoft® Windows® 7 / XP. Set to [Enabled] if using Microsoft® Windows® 7 / XP.

No-Execute Memory Protection

No-Execution (NX) Memory Protection Technology is an enhancement to the IA-32 Intel Architecture. An IA-32 processor with “No Execute (NX) Memory Protection” can prevent data pages from being used by malicious software to execute code.

3.3.2 Chipset Configuration

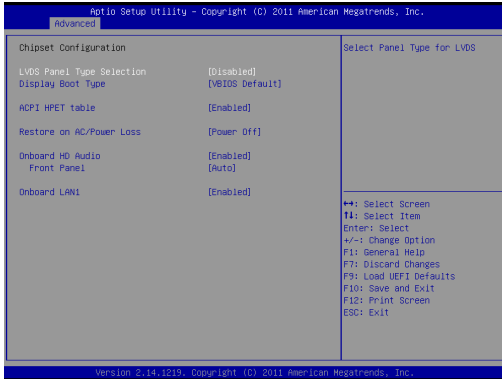

LVDS Panel Type Selection

Use this to select panel type for LVDS. The default value is [Disabled].

Display Boot Type

This allows you to select the boot graphic adapter priority. The default value is [VBIOS Default].

ACPI HPET Table

Use this item to enable or disable ACPI HPET Table. The default value is [Enabled]. Please set this option to [Enabled] if you plan to use this motherboard to submit Windows® certification.

Restore on AC/Power Loss

This allows you to set the power state after an unexpected AC/power loss. If [Power Off] is selected, the AC/power remains off when the power recovers. If [Power On] is selected, the AC/power resumes and the system starts to boot up when the power recovers.

Onboard HD Audio

Select [Enabled] or [Disabled] for the onboard HD Audio feature.


Front Panel

Select [Auto] or [Disabled] for the onboard HD Audio Front Panel.

Onboard LAN1

This allows you to enable or disable the "Onboard LAN1" feature.

3.3.3 Storage Configuration

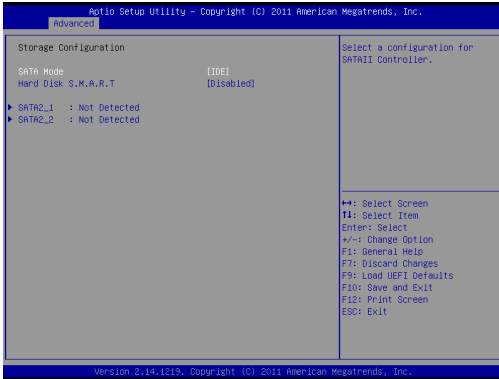

SATA Mode

Use this to select SATA mode. Configuration options: [IDE], [AHCI] and [Disabled]. The default value is [IDE].




AHCI (Advanced Host Controller Interface) supports NCQ and other new features that will improve SATA disk performance but IDE mode does not have these advantages.

Hard Disk S.M.A.R.T.

Use this item to enable or disable the S.M.A.R.T. (Self-Monitoring, Analysis, and Reporting Technology) feature. Configuration options: [Disabled] and [Enabled].

3.3.4 Super IO Configuration

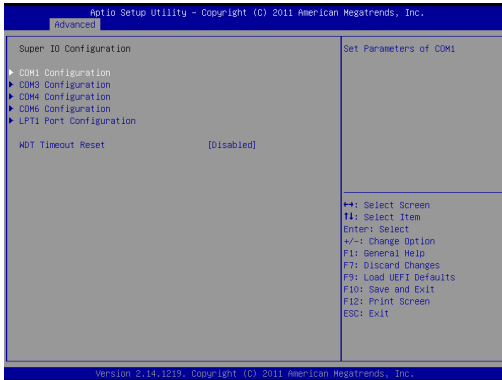

COM1 Configuration

Use this to set parameters of COM1.

COM3 Configuration

Use this to set parameters of COM3.

COM4 Configuration

Use this to set parameters of COM4.

COM6 Configuration

Use this to set parameters of COM6.


LPT1 Port Configuration

Use this set parameters of the onboard parallel port.

WDT Timeout Reset

This allows users to enable/disable the Watch Dog Timer timeout to reset system. The default value is [Disabled].

3.3.5 ACPI Configuration

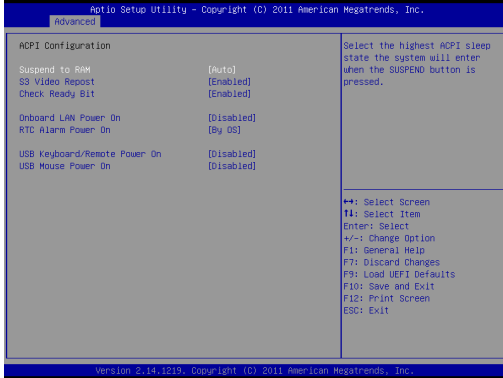

Suspend to RAM

Use this item to select whether to auto-detect or disable the Suspend-to-RAM feature. Select [Auto] will enable this feature if the OS supports it.

S3 Video Repost

Use this to enable/disable S3 Video Repost. The default value is [Enabled].

Check Ready Bit

Use this item to enable or disable the feature Check Ready Bit.

Onboard LAN Power On

Use this item to enable or disable onboard LAN to power on the system.

RTC Alarm Power On

Use this item to enable or disable RTC (Real Time Clock) to power on the system.


USB Keyboard/Remote Power On

Use this item to enable or disable USB Keyboard/Remote to power on the system.

USB Mouse Power On

Use this item to enable or disable USB Mouse to power on the system.

3.3.6 USB Configuration

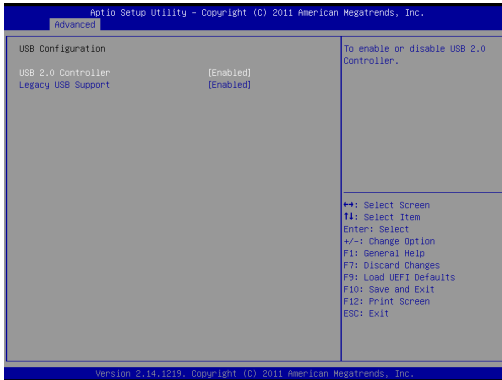

USB 2.0 Controller

Use this item to enable or disable the use of USB 2.0 controller.


Legacy USB Support

Use this option to select legacy support for USB devices. There are two configuration options: [Enabled] and [UEFI Setup Only]. The default value is [Enabled]. Please refer to below descriptions for the details of these options:

[Enabled] - Enables support for legacy USB.

[UEFI Setup Only] - USB devices are allowed to use only under UEFI setup and Windows / Linux OS.

3.3.7 Voltage Configuration

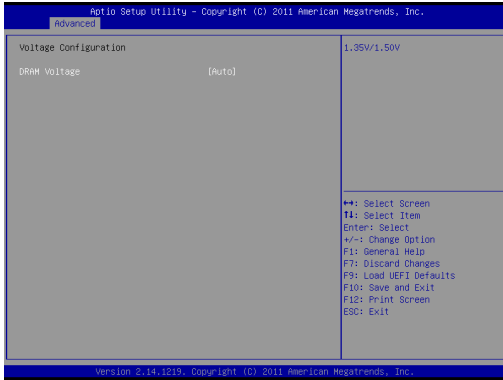


DRAM Voltage

Use this to select DRAM Voltage. The default value is [Auto].

3.4 Hardware Health Event Monitoring Screen

In this section, it allows you to monitor the status of the hardware on your system, including the parameters of the CPU temperature, motherboard temperature, CPU fan speed, chassis fan speed, and the critical voltage.

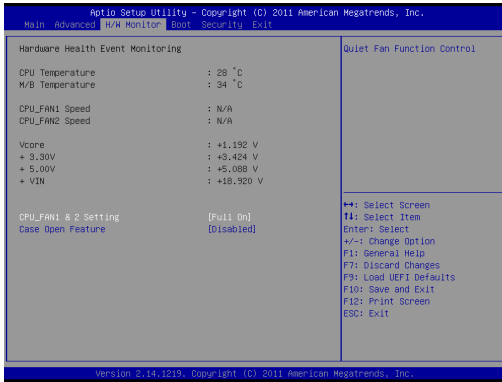

CPU_FAN1 & 2 Setting

This allows you to set CPU_FAN1 & 2's speed. Configuration options: [Full On] and [Automatic Mode]. The default value is [Full On].

Case Open Feature


This allows you to enable or disable case open detection feature. The default is value [Disabled].

Clear Status

This option appears only when the case open has been detected. Use this option to keep or clear the record of previous chassis intrusion status.

3.5 Boot Screen

In this section, it will display the available devices on your system for you to configure the boot settings and the boot priority.

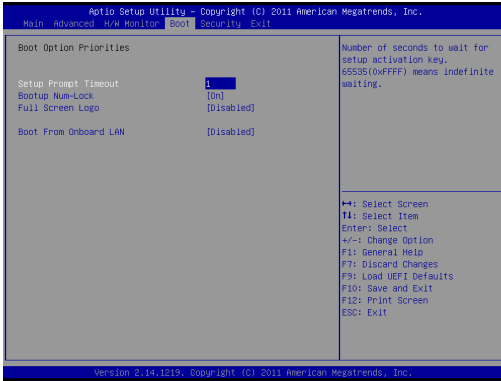

Setup Prompt Timeout

This shows the number of seconds to wait for setup activation key. 65535(0xFFFF) means indefinite waiting.

Bootup Num-Lock

If this item is set to [On], it will automatically activate the Numeric Lock function after boot-up.

Full Screen Logo

Use this item to enable or disable OEM Logo. The default value is [Disabled].

Boot From Onboard LAN

Use this item to enable or disable the Boot From Onboard LAN feature.

3.6 Security Screen

In this section, you may set, change or clear the supervisor/user password for the system.



3.7 Exit Screen



Save Changes and Exit

When you select this option, it will pop-out the following message, “Save configuration changes and exit setup?” Select [OK] to save the changes and exit the UEFI SETUP UTILITY.

Discard Changes and Exit

When you select this option, it will pop-out the following message, “Discard changes and exit setup?” Select [OK] to exit the UEFI SETUP UTILITY without saving any changes.

Discard Changes

When you select this option, it will pop-out the following message, “Discard changes?” Select [OK] to discard all changes.

Load UEFI Defaults

Load UEFI default values for all the setup questions. F9 key can be used for this operation.

Launch EFI Shell from filesystem device

Attempts to Launch EFI Shell application (Shell64.efi) from one of the available filesystem devices.

Chapter 4: Software Support

4.1 Install Operating System

This motherboard supports various Microsoft® Windows® operating systems: 7 / 7 64-bit / XP / XP 64-bit. Because motherboard settings and hardware options vary, use the setup procedures in this chapter for general reference only. Refer your OS documentation for more information.

4.2 Support CD Information

The Support CD that came with the motherboard contains necessary drivers and useful utilities that enhance the motherboard's features.

4.2.1 Running The Support CD

To begin using the support CD, insert the CD into your CD-ROM drive. The CD automatically displays the Main Menu if "AUTORUN" is enabled in your computer. If the Main Menu did not appear automatically, locate and double click on the file "ASRSETUP.EXE" from the BIN folder in the Support CD to display the menus.

4.2.2 Drivers Menu

The Drivers Menu shows the available device's drivers if the system detects installed devices. Please install the necessary drivers to activate the devices.

4.2.3 Utilities Menu

The Utilities Menu shows the application software that the motherboard supports. Click on a specific item then follow the installation wizard to install it.

4.2.4 Contact Information

If you need to contact ASRock or want to know more about ASRock, you're welcome to visit ASRock's website at <http://www.asrock.com>; or you may contact your dealer for further information.