





# ASRock Jumpers and headers setting guide

## IMB-780


The terms HDMI™ and HDMI High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

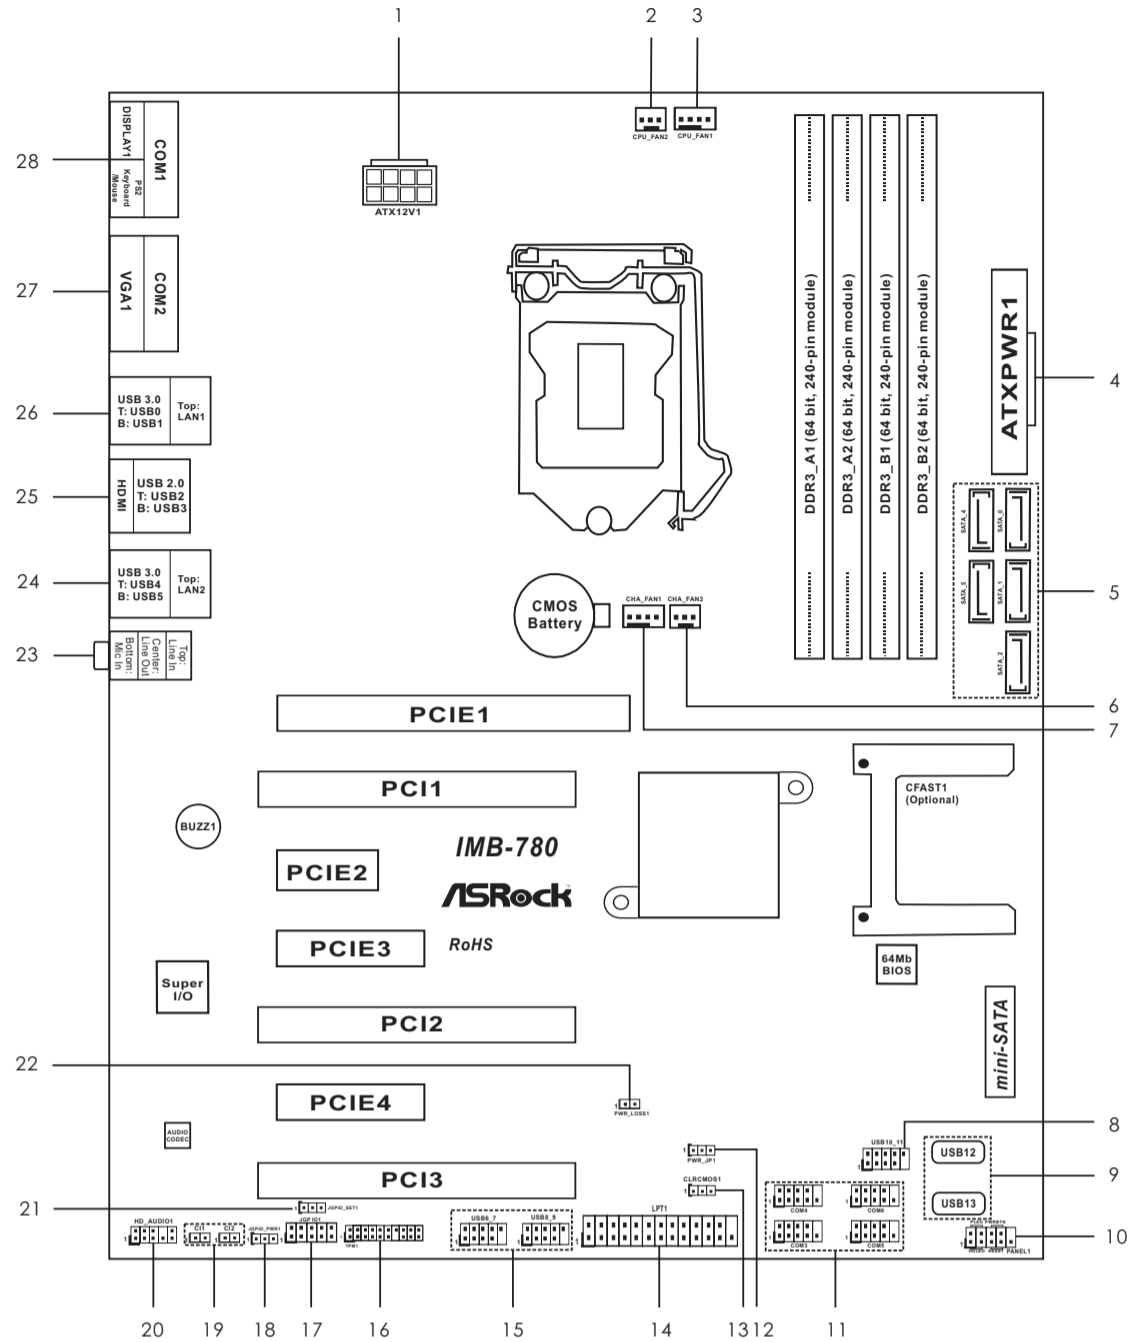


1 : ATX 12V Power Connector



2 : 3-Pin CPU FAN Connector (+12V)




3 : 4-Pin CPU FAN Connector (+12V)




4 : 24-pin ATX Power Input Connector

5 : SATA3 Connectors


6 : 3-Pin Chassis FAN Connector (+12V)



7 : 4-Pin Chassis FAN Connector (+12V)

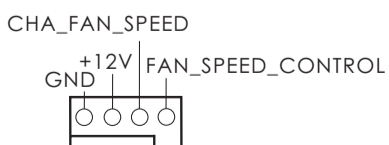


8, 15 : USB2.0 Headers




9 : USB2.0 Ports

10 : System Panel Header




11 : RS-232 Port 4 Pin Headers




12 : ATX/AT mode Selection

1-2: AT mode  
2-3: ATX mode




13 : Clear CMOS Header


1-2: Normal  
2-3: Clear CMOS




14 : Printer Port Header

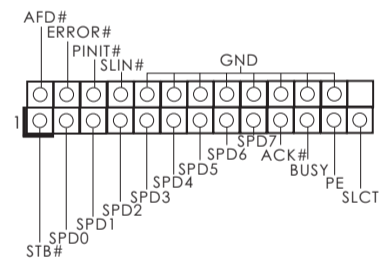

16 : TPM Header

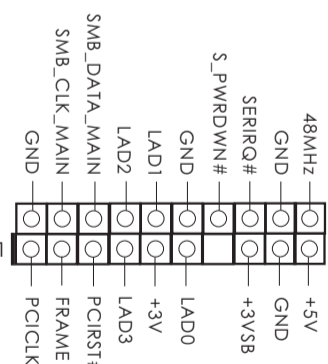


17 : Digital Input / Output Pin Header




PIN	Signal Name	PIN	Signal Name
1	SIO_24	2	SIO_20
3	SIO_25	4	SIO_21
5	SIO_26	6	SIO_22
7	SIO_27	8	SIO_23
9	JGPIO_PWR1	10	GND

18 : Digital Input / Output Power select

1-2: +12V  
2-3: +5V



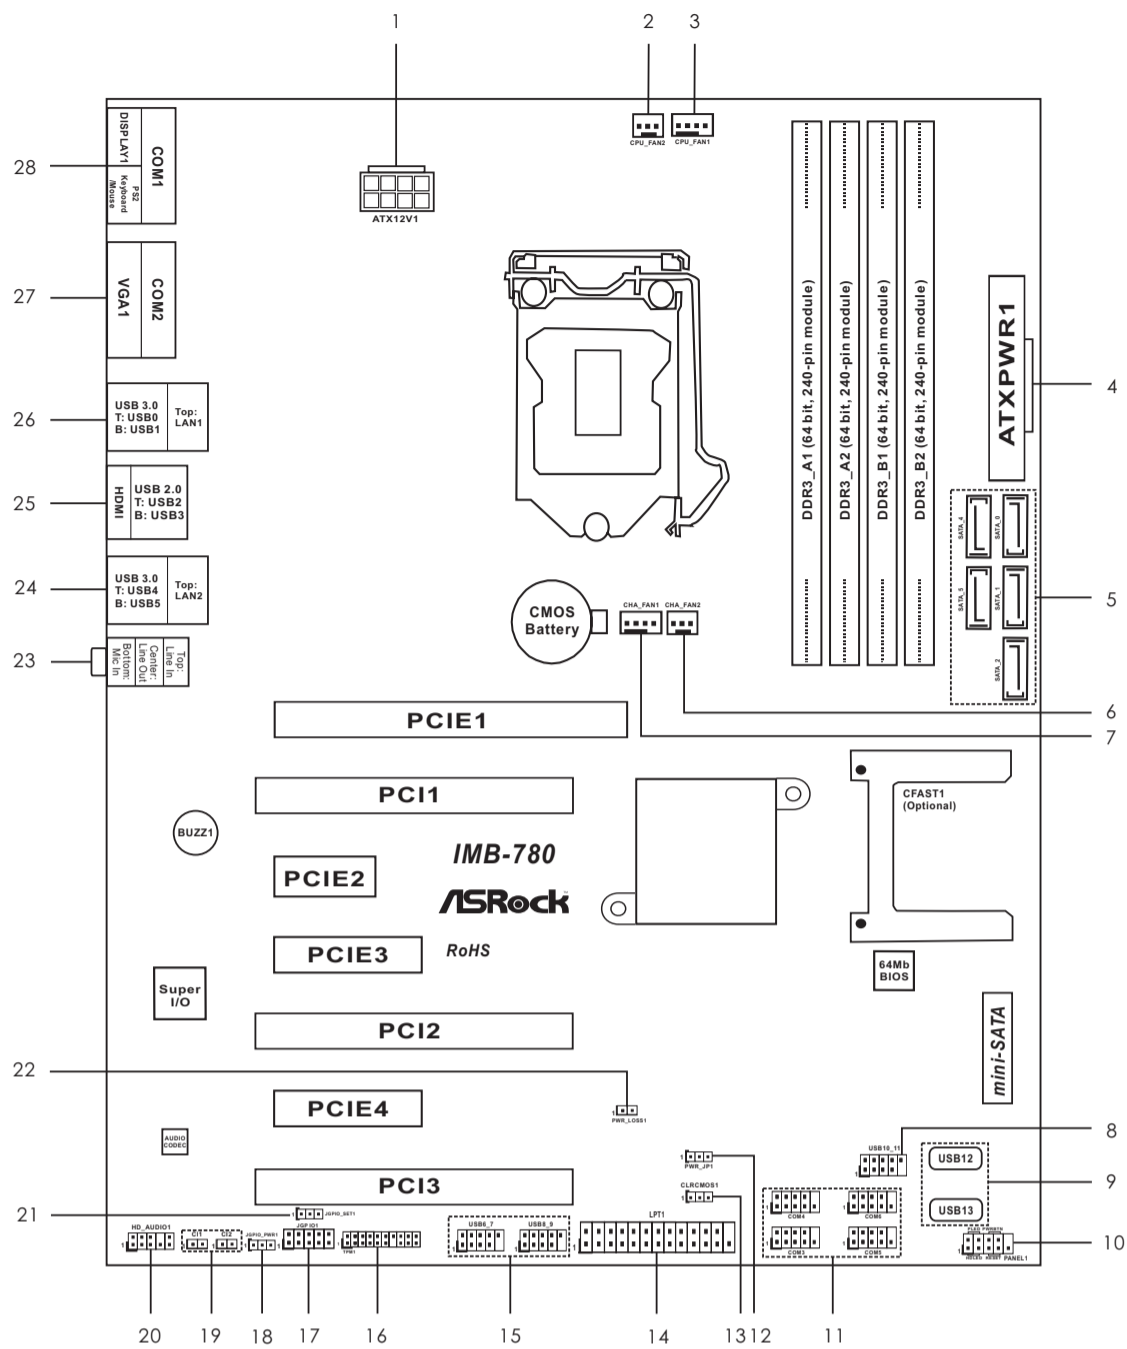


19 : Chassis Intrusion Headers



27 : Top : COM2\*  
Bottom : VGA1

20 : Front Panel Audio Header



28 : Top : COM1\*  
Bottom left: Display1  
Bottom right: PS/2 Keyboard/Mouse

\* This motherboard supports RS232/422/485 on COM1, 2 ports.  
Please refer to below table for the pin definition. In addition, COM1, 2 ports (RS232/422/485) can be adjusted in BIOS setup utility > Advanced Screen > Super IO Configuration. You may refer to page 33 of our user manual for details.


COM1, 2 Port Pin Definition

PIN	RS232	RS422	RS485
1	DCD, Data Carrier Detect	TX-	RTX-
2	RXD, Receive Data	RX+	N/A
3	TXD, Transmit Data	TX+	RTX+
4	DTR, Data Terminal Ready	RX-	N/A
5	GND	GND	GND
6	DSR, Data Set Ready	N/A	N/A
7	RTS, Request To Send	N/A	N/A
8	CTS, Clear To Send	N/A	N/A
9	No Power/5V/12V	N/A	N/A

21 : Digital Input / Output Default Value Setting



22 : PWR LOSS Header  
Short: Power Loss  
Close: no Power Loss



23 : Audio Jacks  
Blue - Line In  
Green - Line Out  
Pink - Mic In

24 : Top : RJ45 LAN Port 2  
Bottom : USB3.0 (USB3\_4\_5)

25 : Top : USB2.0 (USB23)  
Bottom : HDMI

26 : Top : RJ45 LAN Port 1  
Bottom : USB3.0 (USB3\_0\_1)