


# / Front View




/ Rear View

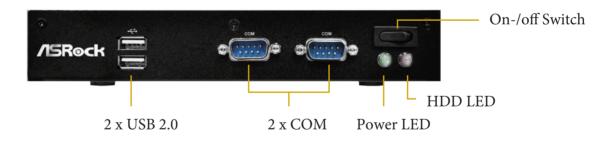


#### 1. Removing the Top Cove

1. Remove the ten screws that secure the top cover.

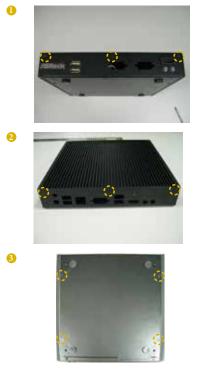

## 2. Lift up and remove the top cover.

#### 2. Installing the SO-DIMM



#### 3. Installing the Hard Drive

1. Remove the four screws that secure the HDD mounting bracket.





2. Lift up and remove the HDD mounting bracket.

### 4. Installing a 2.5-inch Hard Drive

- 1. Place the HDD into the HDD mounting bracket.
- 2. Secure the hard drive into the place using the four screws (two on each side).
- 3. Attach one end of the SATA 1 to 1 Power Cable to the hard drive.



4. Secure the HDD mounting bracket to the chassis using the four screws.





5. Attach the SATA data cable and power cable to the motherboard.




#### 5. Replacing the Top Cover

1. Replace the top cover, making sure the mark on the top cover is aligned with the HDD mounting bracket.



2. Install the ten screws that secure the top cover.

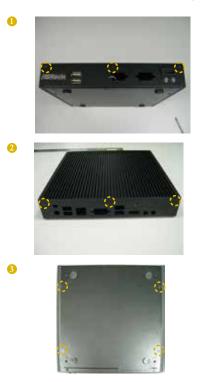

#### Note

For more details on the hardware installation, please refer to the User Manual in the support CD.

The terms HDMI<sup>™</sup> and HDMI High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

