

26" LCD Open frame SAW Touch Monitor

(the Dust-proof Type)

User Guide

Rev2.0

Model: KOT-0260US-SA4BP



Shenzhen K&JAD Technology Co., Ltd

www.keetouch.com

Dec. 2010

Product Description

Keetouch's 26" LCD touch monitors have a long-lasting product cycle because the enclosure is controlled by Keetouch's specifications. Future panel improvements are therefore possible without external changes. The KOT-0260US-SA4BP integrate with the Keetouch's SAW technology touchscreen.

◆ Feature:

- Long lasting product cycle-enclosure controlled by Keetouch specifications.
- Future generation panels phased-in without external changes.
- High quality panel with high brightness,high contrast ratio and broad viewing angle.
- Multiple mounting options including VESA mount, horizontal or vertical bracket-mount.
- Keetouch's SAW technology on pure glass for the ultimate in image quality.
- Dual USB and RS232 touch interface.


For full Product Specifications refer as below:

◆ Specification

Model No.	KOT-0260US-SA4BP	
Series	OT	
Structure	Metal-cased Openframe and Black metal Dust-proof Front Bezel	
LCD Type	Active matrix TFT-LCD	
Display Size	26 " (diagonal)	
Active Area	566.40 mm×339.84mm	
Suggested Resolution	1920×1080	
Support Colors	16.7M	
Brightness(Typ.)	Pure LCD Panel	500cd/m ²
	With SAW Glass Sensor	450cd/m ²
Response Time(Typ.)	6.5ms	
Viewing Angle (Typ.at CR>10))	Horizontal(left/right)	85°/85°
	Vertical(up/down)	85°/85°
Contrast Ratio(Typ.)	4000:1	
Video Input	1. Analog RGB 2.HDMI	
Video Signal Input Connector	Mini D-Sub 15-pin VGA and HDMI	
Frequency (H/V)	30~80KHz / 60~75Hz	
Power Supply	External: AC100-240V, 50-60 Hz	
Environment	Operating Temp.	0~50°C
	Storage Temp.	-20~60°C

	Operating RH:	20%~80%
	Storage RH:	10%~90%
MTBF	50,000 Hours	
LCD Back light Life(Typ.)	50,000 Hours	
Weight (N.W/G.W)	20Kg /25Kg (Approx.)	
Power Consumption	80W Max.	
Mount Interface	1)VESA 100mm 2)Mount bracket, horizontal or vertical (Standard mount brackets are supplied)	
OSD Control	Buttons	AV/TV,UP,DOWN,RIGHT,LEFT,MENU,POWER
	Function	Brightness, Contrast Ratio, Auto-adjust, Phase, Clock, H/V Location, Languages, Function, Reset
Touch screen Type	Keetouch 26" SAW 4mm thickness of touch screen sensor ,thickness and anti-glare are optional.	
Touch System Interface	USB and RS232	
Certificates	ETL,RoHS	

◆ Mechanical Drawing

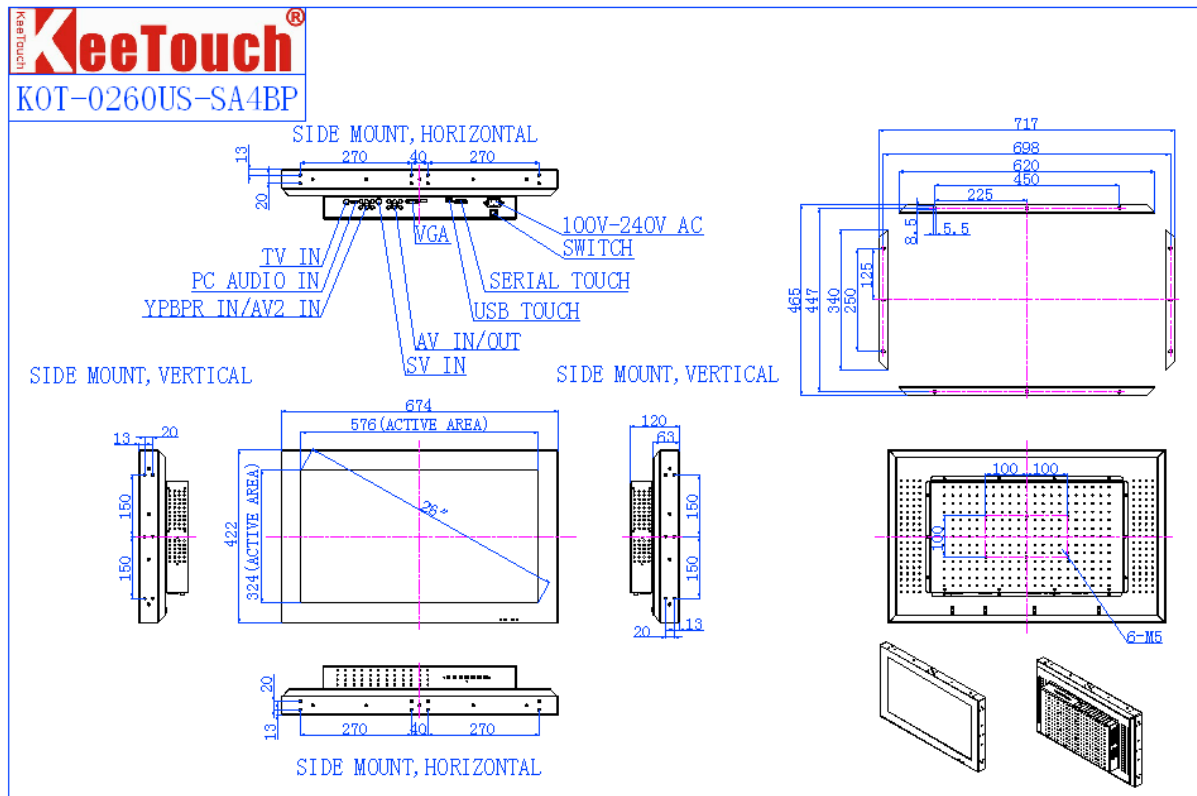

◆ Accessories

Power Cable: A US, EU or UK power cable is included according to the end user's area.

Touch/Video/DVI Cables: Detachable serial and USB touch cable, video cable and DVI cable are included

L-brackets: Four standard L-brackets are included.

Software CD

◆ Typical Application

Gaming/Casino Systems
Outdoor and indoor Kiosks
Entertainment
Transport and Ticketing
Hospitality
Banking
Customised Solutions



How to contact us

www.Keetouch.com

*Add: 1-4th Floor, Building 9
Luck-King Science & Industry Park
Gongyedong Road, Longhua
Baoan, Shenzhen 518109, P.R.China*

Tel: +86-755-82599299

Fax: +86-755-82599968

Sales & Marketing: sales@keetouch.com

Technical Support: support@keetouch.com

