

Open Top cover




1. Loosen 6 screws from front wall and rear wall to open top cover.

Disassemble supporter and HDD Bracket




2. Loosen screws and take out HDD supporter and HDD bracket.

DRAM Maintenance

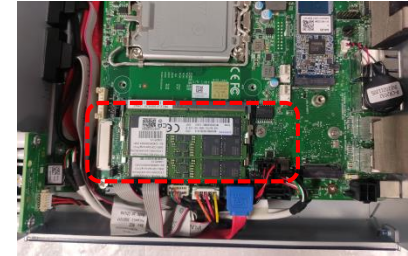


3. Install DIMM to MB on dash line area.

M.2 WiFi Installation

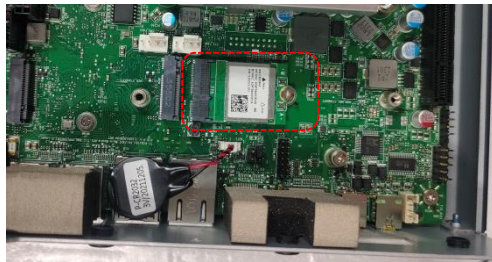


4. Install WiFi card on M.2 slot & plug in antenna IPEX header on WiFi card on dash line area.

mSATA SSD / mPCIe expansion card Installation

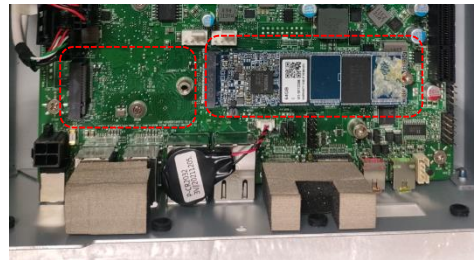

5. Install mSATA SSD or mPCIe expansion card to PCIe slot on dash line area.

Remove CPU protection cover

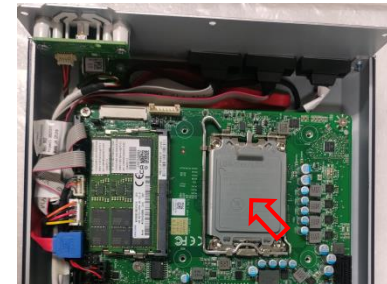

6. Remove CPU protection cover.

CPU and CPU heatsink Installation



7. Install CPU and CPU heatsink to MB

SATA cable Installation



8. Insert SATA and SATA power cable in MB, and routing cable to back.

2.5 SSD Installation



9. Install SSD to HDD bracket and install it to chassis.